


HB-700 (中角配光)

○諸特性


光源		LED 24,000lm					
最大取付間隔		A-A			B-B		
		0.93H			0.92H		
器具 効率	上方光束	0.0%					
	下方光束	99.3%					
	計	99.3%					
保守率		良	0.980	中	0.950	否	0.900

○配光曲線図 (cd/1000lm)

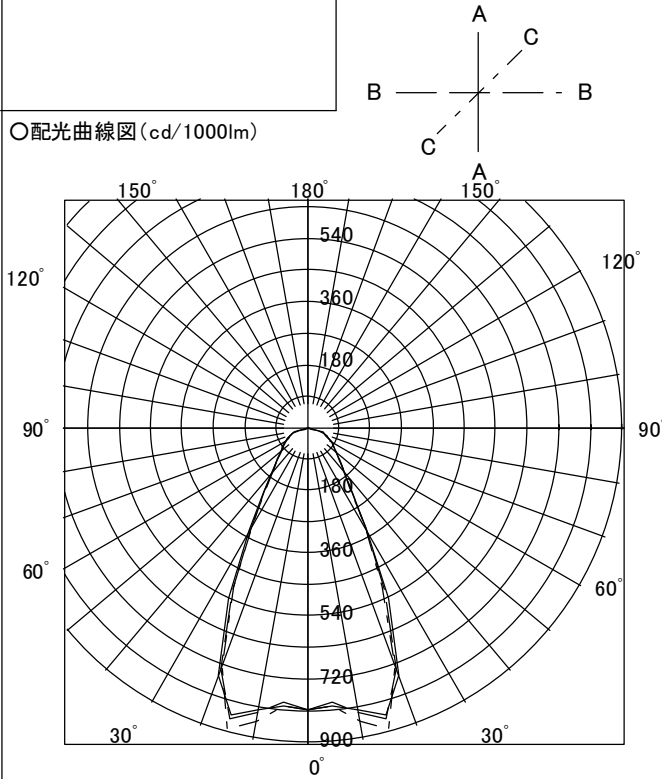

○直射水平面照度

(器具光束: 24000 × 1 = 24000lm/台)

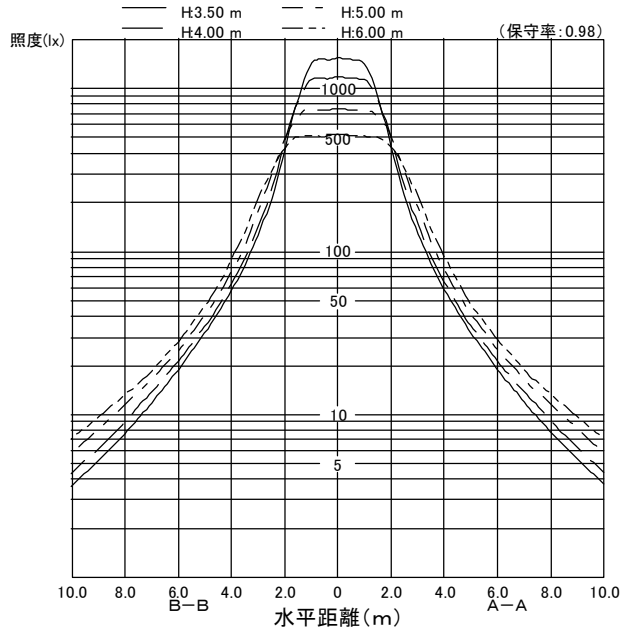

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	54	71	82	89	96	100	107	111	114	118	120	123	125
		10	51	66	74	80	85	88	93	96	98	100	102	104	105
	50	30	42	59	69	77	84	90	98	103	107	112	115	120	123
		10	40	56	65	71	77	82	87	91	93	97	99	102	104
70	70	30	53	70	80	87	93	97	103	107	110	114	116	119	121
		10	50	64	73	79	84	87	92	94	96	99	100	102	104
	50	30	42	58	68	76	83	88	95	100	104	109	112	116	119
		10	40	55	64	71	77	81	86	90	92	96	98	100	102
50	70	30	35	51	61	68	75	81	88	94	98	104	108	113	116
		10	34	49	58	65	71	76	82	86	89	93	96	99	101
	50	30	41	56	66	73	80	84	91	95	98	102	105	108	111
		10	40	54	63	69	75	79	84	88	90	94	96	98	100
30	70	30	35	50	60	66	73	78	85	90	94	99	102	106	109
		10	34	49	58	64	70	74	80	85	87	91	94	97	99
	50	30	34	49	58	65	72	76	82	87	90	94	97	100	103
0	70	30	34	48	57	63	69	74	79	83	86	90	92	95	97
		10	31	45	53	60	66	70	76	81	84	88	91	94	97
0	0	0	29	43	52	58	64	68	74	78	81	85	88	91	94