



BL-640(6900lm)

○諸特性

光源		LED 6,900lm			
最大 取付 間隔	高さ	5.0m	6.0m	7.0m	8.0m
	A-A	6.42m	7.76m	8.89m	10.19m
	B-B	6.15m	7.46m	8.53m	9.70m
器具効率	上方光束	下方光束		計	
	0.0%	100.8%		100.8%	
保守率	良い 0.980	普通 0.950	悪い 0.900		




○配光曲線図 (cd/1000lm)

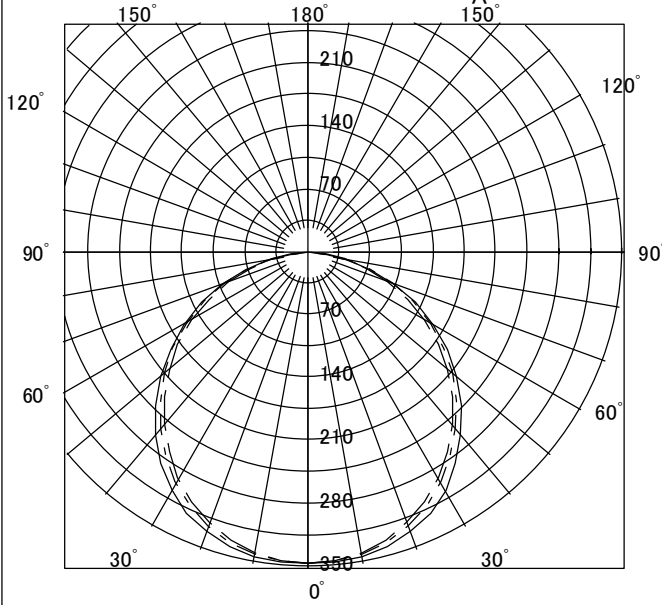

○直射水平面照度

(ランプ光束: 6900 × 1 = 6900lm/台)

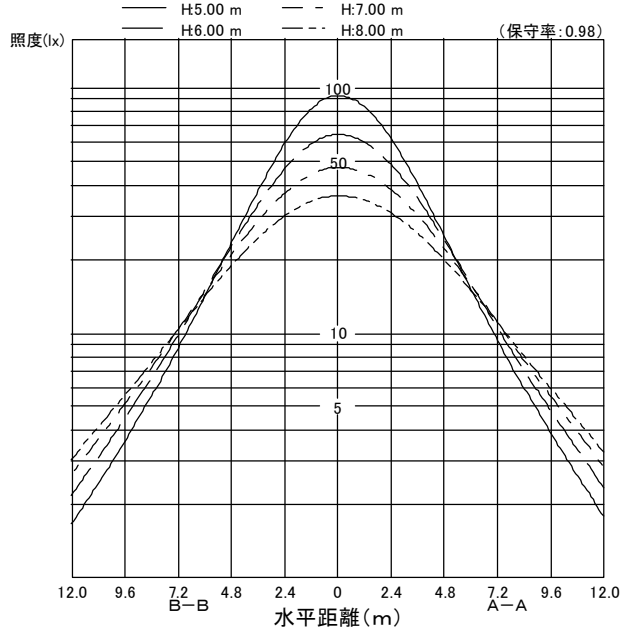

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	46	63	73	82	91	96	104	109	113	117	120	124	126
		10	43	58	67	74	81	85	90	94	97	100	102	104	106
	50	30	32	48	58	68	77	83	93	100	104	110	114	119	123
		10	31	46	55	63	71	76	83	88	91	95	98	101	104
70	70	30	44	61	71	80	88	93	100	105	109	113	116	119	122
		10	42	57	65	72	79	83	89	93	95	98	100	103	104
	50	30	32	47	57	66	75	81	90	97	101	107	111	115	119
		10	30	45	54	62	70	75	82	87	90	94	97	100	103
50	70	30	24	39	48	57	66	72	82	89	94	101	106	111	116
		10	24	38	46	54	63	68	76	82	85	91	94	98	101
	50	30	31	46	55	64	72	77	86	92	95	101	104	108	111
		10	30	44	53	60	68	73	80	85	88	92	95	98	100
30	70	30	24	38	47	56	65	70	79	86	90	96	100	105	109
		10	23	37	46	54	62	67	75	80	84	89	92	96	99
	10	10	19	33	40	48	57	62	70	76	80	86	90	94	97
0	70	30	23	38	46	54	63	68	76	82	86	91	95	99	102
		10	23	37	45	53	61	66	73	79	82	87	90	94	97
	10	10	19	32	40	48	56	61	69	76	79	85	88	92	96
	0	0	18	31	38	46	54	59	67	73	77	82	85	90	93